

See page 7 for information on the **Max AKHL1050E 400 PSI High Pressure Direct Drive Compressor** that can also be used for regular 80-120 PSI tools .



J-Air J103H5-9P/J113H5-9P Gas Single Wheel

FEATURES



- Both models feature: 5.5 HP Honda GX-160 motor, 3450 RPM, 163 cc displacement, and transistorized magneto ignition system; 9 gallon fuel tank
- J103H5-9P performance: 9.5 CFM at 90 PSI, 9 CFM at 100 PSI, 8.2 CFM at 125 PSI
- J113H5-9P performance: 10.9 CFM at 90 PSI, 10.8 CFM at 100 PSI, 10.7 CFM at 125 PSI

Item No. J103H5-9P / Item No. J113H5-9P

J-Air J113R6-9P Gas Single Wheel

FEATURES



- Motor features: 6.5 HP Robin EX21D motor, 3450 RPM, 211 cc displacement, and recoil starter/electric starter ignition
- Performance: 12.7 CFM at 90 PSI, 12.4 CFM at 100 PSI, 12.2 CFM at 125 PSI
- 44" long x 19" wide x 25" high; weighs 160 lbs.
- 9 gallon fuel tank

Item No. J113R6-9P

J-Air J113H6-16P Gas Double Wheel

FEATURES



- Motor features: 6.5 HP Honda GX-200 motor, 3450 RPM, 196 cc displacement, and transistorized magneto ignition
- Performance: 14.0 CFM at 90 PSI, 13.5 CFM at 100 PSI, 13.3 CFM at 125 PSI
- 44" long x 24" wide x 27" high; weighs 205 lbs.
- 16 gallon fuel tank

Item No. J113H6-16P

J-Air J113R6-16P Gas Double Wheel

FEATURES



- Motor features: 6.5 HP Robin EX21D motor, 3450 RPM, 211 cc displacement, and recoil starter/electric starter ignition
- Performance: 12.7 CFM at 90 PSI, 12.4 CFM at 100 PSI, 12.2 CFM at 125 PSI
- 44" long x 24" wide x 27" high; weighs 200 lbs.
- 16 gallon fuel tank

Item No. J113R6-16P

J-Air J114H8-16P Gas Double Wheel

FEATURES



- Motor features: 8.0 HP Honda GX-240 motor, 3450 RPM, 242 cc displacement, and transistorized magneto ignition
- Performance: 17.3 CFM at 90 PSI, 17.0 CFM at 100 PSI, 16.6 CFM at 125 PSI
- 44" long x 24" wide x 32" high; weighs 215 lbs.
- 16 gallon fuel tank

Item No. J114H8-16P

J-Air JHC2-4 Hand Carry

FEATURES



- Motor features: 2.0 HP 115v motor, 3400 RPM
- Performance: 4.0 CFM at 100 PSI
- 21" long x 17" wide x 18.25" high; weighs 65 lbs.
- 4.3 gallon fuel tank

Item No. JHC2-4

J-Air J103E15-9P Electric Single Wheel

FEATURES



- Motor features: 1.5 HP motor, 1725 RPM, 115v at 15A or 230v at 8A
- Performance: 7.4 CFM at 90 PSI, 7.0 CFM at 100 PSI, 6.5 CFM at 125 PSI
- 44" long x 19" wide x 24" high; weighs 155 lbs.
- 9 gallon fuel tank

Item No. J103E15-9P

Makita MAC5200 Gas Single Wheel

FEATURES



- Motor features: 3.0 HP motor, 13.8 amps, oil-lubricated pump
- Performance: 6.5 CFM at 90 PSI, 6.9 CFM at 40 PSI
- 29" long x 19" wide x 19½" high; weighs 88 lbs.
- 5 gallon fuel tank

Item No. MAC5200



FC1500HBP2 "The Baby Bull" Electric Direct Drive



FEATURES

- Motor features: 1.5 HP, 3400 RPM, low amp draw, overload protected with manual reset, 115 volt
- Performance: 7.6 cu. ft. displaced, 3.6 cu. ft. free air at 100 PSI
- Pump features: Rol-Air quality, single stage, ball bearings, cast-iron cylinder, stainless steel reed valves and splash lubrication ensure longer pump life
- 13" long x 12" wide x 20" high; weighs 33 lbs.
- Tank capacity: 1.5 gallons

Item No. FC1500HBP2

FC1500HS3 "The Baby Bull" Electric Direct Drive



FEATURES

- Motor features: 1.5 HP, 3400 RPM, low amp draw, overload protected with manual reset, 115 volt
- Performance: 7.6 cu. ft. displaced, 3.6 cu. ft. free air at 100 PSI
- Pump features: Rol-Air quality, single stage, cast-iron cylinder, stainless steel reed valves and splash lubrication ensure longer pump life
- 20" long x 9" wide x 18" high; weighs 38 lbs.
- Tank capacity: 2.5 gallons

Item No. FC1500HS3

FC2002 "The Bull" Electric Direct Drive



FEATURES

- Motor features: 2 HP, 3400 RPM, low amp draw, overload protection with manual reset, 115 volt
- Performance: 7.8 cu. ft. displaced, 4.0 cu. ft. free air @ 100 PSI
- Pump features: Rol-Air quality, single stage, ball bearings, cast-iron cylinder, stainless steel reed valves and splash lubrication ensure longer pump life
- 20" long x 15" wide x 17" high; weighs 64 lbs.
- Tank capacity: 4.3 gallons

Item No. FC2002

FC2002HBP6 "The Bull" Electric Direct Drive



FEATURES

- Motor features: 2 HP, 3400 RPM, low amp draw, overload protection with manual reset, 115 volt
- Performance: 7.6 cu. ft. displaced, 4.0 cu. ft. free air at 100 PSI
- Pump features: Rol-Air quality, single stage, cast-iron cylinder, stainless steel reed valves and splash lubrication ensure longer pump life
- 16" long x 14" wide x 31" high; weighs 70 lbs.
- Tank capacity: 5.3 gallons

Item No. FC2002HBP6

D2000HBP6 Electric Direct Drive



FEATURES

- Motor features: 2 HP, 3400 RPM, low amp draw, overload protection with manual reset, 115 volt,
- Performance: 7.8 cu. ft. displaced, 4.3 cu. ft. free air at 100 PSI
- Pump features: heavy-duty, single stage, ball bearings, intake filter/silencer, stainless steel reed valves and splash lubrication ensure long pump life
- 16" long x 14" wide x 31" high; weighs 70 lbs.
- Tank capacity: 5.3 gallons

Item No. D2000HBP6

D2002HPV5 Electric Direct Drive



FEATURES

- Motor features: 2 HP, 3400 RPM low amp draw, overload protection with manual reset, 115 volt
- Performance: 7.8 cu. ft. displaced, 4.0 cu. ft. free air at 100 PSI
- Pump features: heavy-duty with cast iron cylinders, metal intake filter/silencer, stainless steel reed valves and splash lubrication ensure long pump life
- 18" long x 16" wide x 17" high; weighs 62 lbs.
- Tank capacity: 4.5 gallons

Item No. D2002HPV5

GD4000PV5H Gas Direct Drive

FEATURES

- Motor features: 4 HP Honda engine, cast-iron cylinder sleeve, overhead valves, on/off switch, dual element air cleaner, electronic ignition, low oil control
- Performance: 5.1 cu. ft. free air at 40 PSI, 4.4 cu. ft. free air at 100 PSI, 4.0 cu. ft. free air at 125 PSI
- Pump features: heavy-duty, single stage, splash lubricated, metal filter w/silencer, fan cooled and fixed rotation speed
- 22" long x 16" wide x 16" high; weighs 72 lbs.
- Tank capacity: 4.5 gallons



Item No. GD4000PV5H

5715K17 Electric Belt Drive

FEATURES

- Motor features: 1½ HP, 1725 RPM, open drip proof, 115/230 volt, overload protection with manual reset
- Performance: 10.1 cu. ft. displaced, 6.9 cu. ft. free air at 100 PSI
- Pump features: twin cast iron cylinders, hardened steel valve plates with swedish lamellar reed valves, aluminum alloy connecting rods with automotive-style inserts, and oil sight glass
- 46" long x 19" wide x 28" high; weighs 180 lbs.
- Tank capacity: 9 gallons



Item No. 5715K17

4090HK17-RG Gas Belt Drive

FEATURES

- Motor features: 5.5 HP Honda 4 cycle engine, complete die cast aluminum alloy with cast-iron sleeve, overhead valves, retractable starter, splash lubricated, low oil shutdown
- Performance: 13.1 cu. ft. displaced, 8.9 cu. ft. free air at 100 PSI
- Pump features: heavy-duty single stage, cast-iron twin cylinders, splash lubricated, cast-iron valve plates, oil sight gauge
- 46" long x 19" wide x 28" high; weighs 175 lbs.
- Tank capacity: 9 gallons



Item No. 4090HK17-FRG

6590HK18-RG Gas Belt Drive

FEATURES

- Motor features: 6.5 HP Honda 4 cycle engine, complete die cast aluminum alloy with cast-iron sleeve, overhead valves, retractable starter, splash lubricated, low oil shutdown
- Performance: 17.4 cu. ft. displaced, 13.1 cu. ft. free air at 100 PSI
- Pump features: heavy-duty, single stage, cast-iron twin cylinders, splash lubricated, cast-iron valve plates, oil sight gauge
- 46" long x 19" wide x 29" high; weighs 180 lbs.
- Tank capacity: 9 gallons



Item No. 6590HK18-FRG

V5160K25X Stationary Compressor

FEATURES

- Motor features: 5 HP motor, 3450 RPM, open drip-proof, 1 phase, 230 volt, overload protected
- Performance: 14.5 cu. ft. displaced, 10.6 cu. ft. free air at 175 PSI
- Pump features: heavy-duty, two stage, twin cylinders, multiple V-belt drive, low operating RPM's
- 30" long x 20" wide x 73" high; weighs 375 lbs.
- Tank capacity: 60 gallons
- Also available with 80 gallon tank



Item No. V5160K25X

8422HK30-RG Gas Belt Drive

FEATURES

- Motor features: 8 HP Honda 4 cycle engine, complete aluminum alloy with cast-iron sleeve, overhead valves, retractable starter, splash lubricated, low oil shutdown
- Performance: 24.4 cu. ft. displaced, 19.2 cu. ft. free air at 100 PSI
- Pump features: two stage pump, cast-iron cylinders, splash lubricated, cast-iron valve plates, oil sight gauge
- 46" long x 28" wide x 35" high; weighs 285 lbs.
- Tank capacity: 9 gallons



Item No. 8422HK30-FRG



Couplers and Connectors

Coilflow™ Six Ball Couplers

Coilflow Six Ball Interchange Couplers feature six stainless steel locking balls to provide a more balanced and secure connection. The locking ball diameter is sized to properly fit the connectors' form to allow greater surface contact. This makes the connector more durable, even in high-vibration conditions. These couplers are compatible with other manufacturers' couplers within the same interchange series.

Our Six Ball Couplers feature six locking balls which provide a more secure and balanced connection, extending the life of the connector.



Drag guard prevents accidental uncoupling when snagged.



Industrial Interchange 1/4" Body Size (Type I5)

Thread & Barb Size	Female	Male	Nose Barbs	Lock-On Hose Barb	Reusable Polyurethane Hose Barb
1/8"	15X2F	15X2M	n/a	n/a	n/a
1/4"	15X4F	15X4M	15X4H	15X4L	15X4PR
5/16"	n/a	n/a	15X5H	n/a	n/a
3/8"	15X6F	15X6M	15X6H	15X6L	n/a



Air Hose
with 1/4"
6 ball
Industrial
Coupler and
Connector

- 5/16" x 50' CH51650B (Blue), CH51650R (Red), CH51650Y (Yellow)
- 5/16" x 100' CH516100B (Blue), CH516100R (Red), CH516100Y (Yellow)
- 1/4" x 50' CH1450B (Blue), CH1450R (Red), CH1450Y (Yellow)
- 1/4" x 100' CH14100B (Blue), CH14100R (Red), CH14100Y (Yellow)



Typhoon pro

Blow Gun

- TYP2501-CS
1/4" NPT Chrome-Plated Blow Gun with High Flow Tip



FilterPlug™


Filter and connector in one - protects your air tool from dirt and debris

- 1501LF 1/4" industrial Interchange x 1/4" MPT Ball Swivel
- 1503LF 1/4" industrial Interchange x 3/8" MPT Ball Swivel

FlexCoil Polyurethane Recoil Hose



- PR14-25CB15-B
1/4" x 25' Industrial Int. Coil x 1/4" MPT

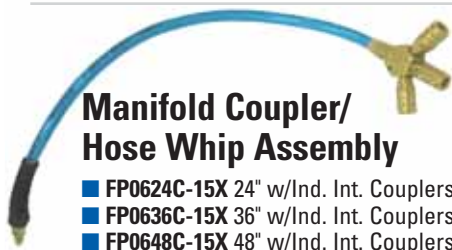

Manifold Coupler/Hose Whip Assembly

- FP0624C-15X 24" w/Ind. Int. Couplers
- FP0636C-15X 36" w/Ind. Int. Couplers
- FP0648C-15X 48" w/Ind. Int. Couplers



Fittings with Strain Relief

- PSM0404SR Swivel Hose End
1/4" ID x 1/4" with Strain Relief

Air Tool Lubricants

- ATL016 16 oz.
- ATL016W 16 oz. winter formula
- ATL128 Gallon



Hose Splicers

- PHS0406 1/4" Reusable Splicer
- PHS0507 5/16" Reusable Splicer



Ball Swivel Connectors

- 15-04BS 1/4" Industrial Int. x 1/4" MPT
- 15-06BS 1/4" Industrial Int. x 3/8" MPT



Automatic Couplers

- 15C90B4F 1/4" FPT
- 15C90B6M 3/8" MPT



Mini Regulator Assembly

- ER02-15X Regulator with 1/4" Industrial



Connectors

- 1501 1/4" MPT Connector 1/4" body size
- 1503 3/8" MPT Connector, 1/4" body size



Manifold Assembly

- 3122-15X
1/4" Industrial Manifold Assembly

Some of the Air Accessories that we sell:

- Bushing Adapters
- Circle Clamps
- Coupler Plugs
- Coupler Plug Sets
- Crosses and Tees
- Gauges
- Filters
- Hex Manifolds
- Hex Manifold Kits
- Hex Nipples
- Hose Accessory Kits
- Hose Repair Kits
- Lubricators
- Reducer Bushings
- Regulators
- Regulator Repair Kits
- Three Way Manifold
- Three Way Manifold Kits

Robin

SUBARU



YAMAHA

Robin RGX2900 Brushless Multi-Duty



FEATURES

- 2900 watt max power (2400 rated)
- Rated maximum AC current: 20 amps @ 120v
- Runs up to 10.5 continuous hours
- Engine features: OHC, 4-cycle, air cooled gasoline engine
- 4.4 gallon fuel tank
- GFCI breaker circuit breaker
- 27" long x 17" wide x 19" high; weighs 106 lbs.

Item No. RGX2900

Robin RGX4800 Brushless Multi-Duty



FEATURES

- 4800 watt max power (4100 rated)
- Rated maximum AC current: 34 amps @ 120V; 17 amps @ 240V
- Runs up to 6 continuous hours
- Engine features: OHC, 4-cycle, air cooled gasoline engine
- 4.4 gallon fuel tank
- GFCI breaker circuit breaker
- 26" long x 21" wide x 22" high; weighs 154 lbs.

Item No. RGX4800

Robin RGV6100 Brushless Multi-Duty



FEATURES

- 5800 watt max power (4800 rated)
- Rated maximum AC current: 40 amps @ 120V; 20 amps @ 240V
- Runs up to 7 continuous hours
- Engine features: OHC, 4-cycle, air cooled gasoline engine
- 5.7 gallon fuel tank
- Fuseless circuit breaker
- 26.8" long x 18.5" wide x 24.8" high; weighs 172 lbs.

Item No. RGV6100

Robin RGV12100 Brush-Type Industrial



FEATURES

- 12,000 watt max power (10,000 rated)
- Rated maximum AC current: 83.3 amps @ 120V; 41.7 amps @ 240V
- Runs up to 8.2 continuous hours
- Engine features: OHC, 4-cycle, air cooled gasoline engine
- 11.6 gallon fuel tank
- Fuseless circuit breaker
- 32.5" long x 30.2" wide x 33.7" high; weighs 329 lbs.

Item No. RGV12100

Robin RGV13100T 3-Phase Industrial



FEATURES

- 13,000 watt max power (10,000 rated)
- Rated maximum AC current: 28 amps @ 120V or 28 amps @ 208V in single phase mode; 34.6 amps @ 208V in three phase mode
- Runs up to 8.9 continuous hours
- Engine features: OHC, 4-cycle, air cooled gasoline engine
- 11.4 gallon fuel tank
- GFCI breaker circuit breaker
- 32.5" long x 30.2" wide x 33.7" high; weighs 315 lbs.

Item No. RGV13100T

Robin R1700i Portable Inverter



FEATURES

- 1650 watt max power (1400 rated)
- Rated maximum AC current: 11.7 amps @ 120V
- Runs up to 4 continuous hours
- Engine features: OHC, 4-cycle, air cooled gasoline engine
- 1.1 gallon fuel tank
- Electronic / GFCI circuit breaker
- 19.3" long x 11.6" wide x 17.5" high; weighs 45 lbs.

Item No. R1700i

Yamaha YG5200D Brushless AC



FEATURES

- 5200 watt max power (4500 rated)
- Rated AC current: 37.5 amps @ 120V; 18.8 amps @ 240V
- Runs up to 9.5 continuous hours
- Engine features: OHV, 4-stroke, air cooled gasoline engine
- 5.6 gallon fuel tank
- 26.4" long x 20.1" wide x 22" high; weighs 183 lbs.
- Optional wheel kit available

Item No. YG5200D

Also Available: YG5200DX (5200 Watt Premium Generator)

Yamaha YG6600DE Brushless, AVR AC



FEATURES

- 6600 watt max power (6000 rated)
- Rated AC current: 50 amps @ 120V; 25 amps @ 240V
- Runs up to 8.3 continuous hours
- Engine features: OHV, 4-stroke, air cooled gasoline engine
- 5.6 gallon fuel tank
- 35.2" long x 20.5" wide x 22" high; weighs 198 lbs.
- Optional wheel kit available

Item No. YG6600DE

Also Available: YG6600DX (6600 Watt Premium Generator)



300 Volt Ezeelock™ Outdoor Extension Cord with Lighted Ends



FEATURES

- UL Approved; stays flexible -40° to 140°
- 12/3 gauge; SJTW wire type

Item No. 05-00106 50' Cord
 Item No. 05-00107 100' Cord

Generator 2' "W" Adapter



FEATURES

- With Ezeelock™ and lighted end
- 3 ends
- Red/black color
- 12/3 gauge; STW wire type

Item No. 09-00213

2' 3-Outlet Power Block



FEATURES

- Designed for maximum flexibility and works with variety of portable tools
- UL Approved
- 12/3 gauge

Item No. 04-00090

Kwik Kustom Extension Cord, 100'



FEATURES

- 100' 12/3 SJTW Extension Cords with lighted ends
- 3 conductor, 300 volt

Item No. 05-00360 Neon Green
 Item No. 05-00361 Neon Orange
 Item No. 05-00362 Neon Pink
 Item No. 05-00363 Neon Yellow
 Item No. 05-00365 Neon Blue

Don't see what you're looking for?

We carry many other brands and products than those listed for each category. The products contained in this catalog are merely a sampling of our best selling items. Our experienced sales and customer service representatives can help you find exactly what you're looking for, or, if we don't stock it, recommend an alternate solution!

We can make your job site deliveries and we also offer repair service for most major brands of tools.

